



Automatic Label Dispenser




This manual should be made available to all users of this equipment. For best results and for maximum durability of the equipment, carefully read and follow all instructions.

For questions or concerns, e-mail service@ussolid.com, visit www.ussolid.com, or call (800) 243-5428


I. Product Specifications

Model	USS-LD00014-120MM	USS-LD00014-160MM
Applicable Label Width	4 - 120mm (0.24 to 4.7 in.)	4 - 160 mm (0.24 to 6.3 in.)
Applicable Label Length	4 - 200 mm (0.16 to 7.87 in.)	
Core Diameter	10 - 75 mm (0.39 to 3 in.)	
Max. Roll Diameter	250 mm (9.84 in.)	
Display	4 digit LED	
Max Feed Speed	60 circles/min	
Motor Power	18 W	
Voltage	AC110V, 60Hz	

II. Machine Introduction

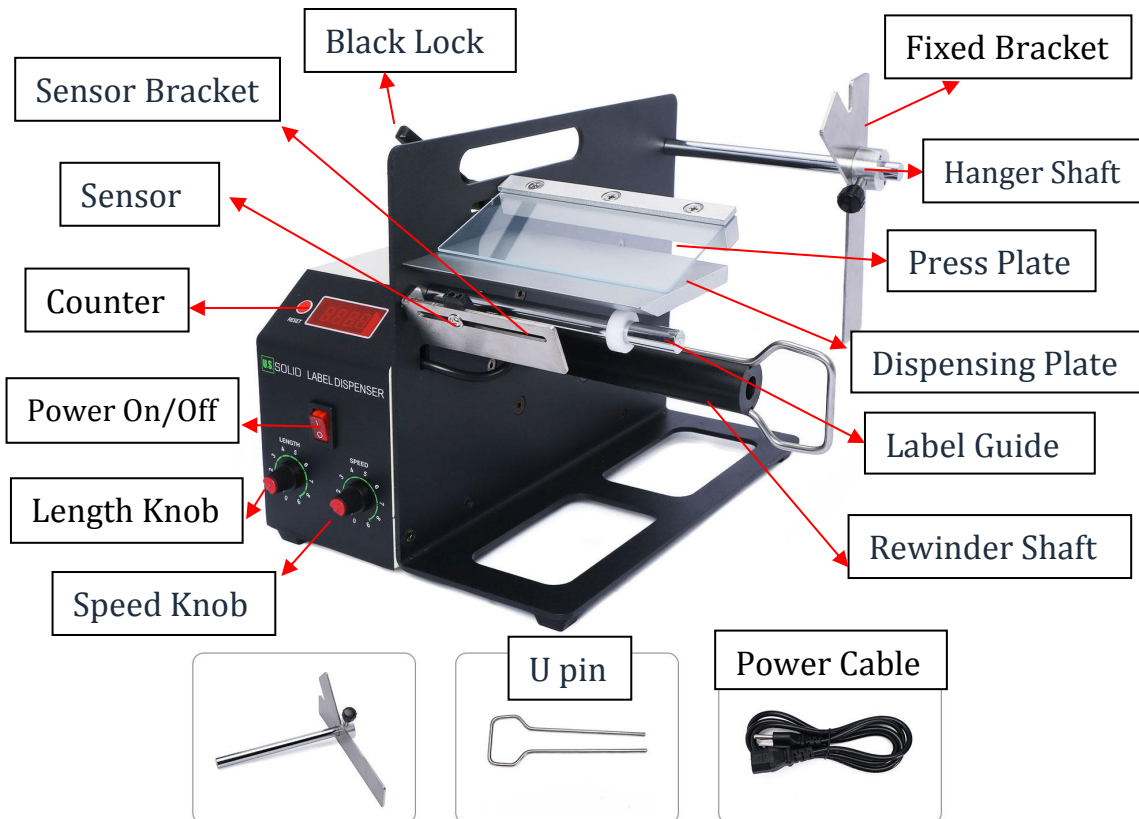

Configuration I for Small Core Diameter



Configuration II for Large Core Diameter

III. Operating Instructions

1. Mount the correct Hanger Shaft onto the machine according to your label's core diameter(Configuration I or Configuration II).
2. Install one label roll onto the Hanger Shaft with the labels facing out.
3. Adjust the Fixed Bracket so that it holds the label core against the roll.
4. Pull the leading edge of the carrier paper under the Press Plate and fix the Press Plate by Black Lock. Through the Press Plate, around the Dispensing Plate and down towards the Label Guide Rod. Then,

For questions or concerns, e-mail service@ussolid.com, visit www.ussolid.com, or call (800) 243-5428

grip the label paper end into the groove on the Rewinder Shaft and fix the end with the U Pin. Make sure the paper is fairly straight.

(See the attached picture.)

5. Gently adjust the position of the white rubber on the Label Guide rod. Note that it is important to exercise care on this step; too much force may cause the label to tear.
6. Point the sensor towards the desired label stop position. You can either pivot the sensor on the shaft, or rotate the metal bracket, or both.
7. Turn the Power Switch to "On".
8. Adjust the Speed and Length Knobs until the desired settings of the label feed are achieved.



IV. Applications

This machine is suitable for most of translucent and opaque labels, like self-adhesive label, barcode label, security labels, packaging label, anti-counterfeit labels, hot stamping stickers, stickers, printing patterns, chrome paper , and many more!

V. Pack List

- 1 – Automatic Label Dispenser
- 1 – Power Cable
- 1 – User Manual

VI. Warranty

The machine's motor and circuit board have a 1 year warranty. This warranty covers any defects in material or workmanship under normal use.

Within 30 days of delivery, U.S. Solid will either work with you to repair your product with replacement parts, replace the product after receiving the returned defective machine, or accept a returned defective machine for a full refund.

After the first 30 days but still within the first 1 year of delivery, U.S. Solid will send new or refurbished replacement parts at no charge so you can repair the product on your own.