


Thank you for purchasing your U.S. Solid Motorized Ball valve. We are happy to have you as a customer! We want you to get the most out of your new equipment, so we have included a few pointers to get you started. Unfold this manual for simple wiring diagrams, schematics, and specifications on your valve.




THREADING

U.S. Solid Valves follow National Standards for pipe thread. In the U.S.A. we

use NPT, while in Europe we use BSPT. We recommend use of teflon tape to ensure seal of the NPT threading, as shown in the figure to the left.

WIRING SCHEMATIC

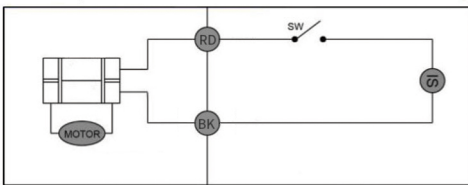

1. When the circuit is closed (switch connecting the valve is on), the valve will open, and remain open. Once open, power consumption is nominal.

2. When the circuit is open (switch connecting the valve is off or power is lost), the valve will close. Once in this state, the valve is fully de-energized.

FREQUENTLY ASKED QUESTIONS

1) Does the valve require water or air pressure to work?

Answer: No! One of the benefits of motorized ball valves is they can work with little water pressure. This means a motorized ball valve can work even with gravity fed arrangements.

2) Can this valve be actuated manually?

Answer: No. This model is not designed to be opened or closed manually.

3) Will this return to closed if power goes out?

Answer: Yes.


4) Can this valve be used outside?

Answer: The motorized ball valves all have a rating of IP67, which means they can withstand temporary immersion between 15cm and 1m. However, if permanently installed outdoors, it is recommended that you enclose the motorized ball valve in some protective housing.

5) Can this motorized ball valve be powered continuously?

Answer: Due to the power limiting features of these valves, they can be hooked up to power non-stop without risk of overheating.

⚠ WARNING

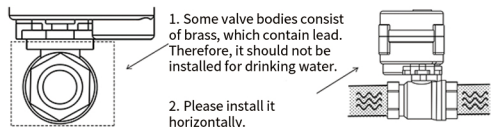

SPECIFICATIONS

Models	JFMSV00029
Product Size	NPT 1/4 inch
Bore Type	Full
Valve Body Material	Brass
Max. Torque	2 N m
Open/Close Time	< 5 s
Voltage	9V-24V AC/DC
Max. Power	5 W
IP Rating	IP67
Max. Pressure	1.0 MPa
Flow Medium Temp. Range	2°C to 90° C
Ambient Temp. Range	-15°C to 50° C
Life Time	70000 times at least
Actuator Material	PPO
O-ring	PTFE
Sealing	FKM
Manual Override	No
On/Off Indicator	Yes

INSTRUCTIONS OF ENVIRONMENT PROTECTION



At the end of its life cycle, please do not dispose of this equipment by

throwing it in the usual garbage. Instead, hand it over at a collection point for the recycling of electrical and electronic appliances. It does not contain dangerous nor toxic products for humans, but inadequate disposal could still damage the environment. The materials are recyclable as mentioned. By recycling material or through other forms or repurposing old appliances, you are making an important contribution to the protection of our environment. Please inquire with your local community authorities for the proper disposal location.

WARRANTY

All U.S. Solid motorized ball valves come with a one year warranty. We realize that other questions or concerns may arise during the installation and operation of your valve. Please contact us or visit our website for help.

Phone: 800-209-4177

Email: service@ussolid.com

Website: www.ussolid.com

